


Bright Q2


TECHNICAL DATA

Application	Surface mounted (wall)
Location	Outdoor
Light Source	LED
Optics	8°, 23°, 43°, 10°x41°
LED No.	2
LED Life time (L80B10)	50000 hours
Input Voltage / Current	230Vac
Connection details	Parallel Connection
Installation	Surface mounted
Weight	0,45Kg
Supply	230Vac
Wiring	Junction in supply box
Working Temperature	-20°C - +50°C

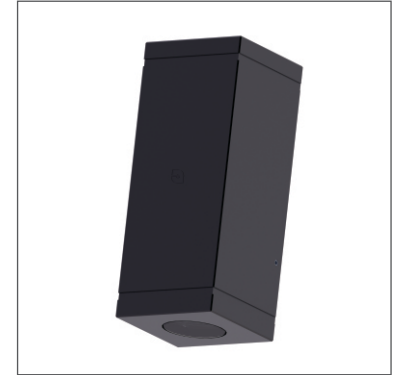

FINISHING

Materials	Aluminium body
Finishing	Anodized Aluminum (A), Black (B), Cor-ten (C)
Diffuser	Tempered Glass Diffuser

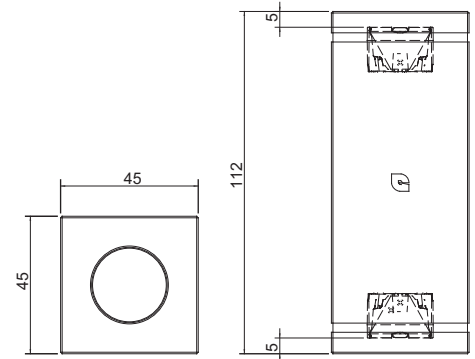

Family	Type	LED NO	WAT/LED	CCT	Optics	Finish	Power	Dimming	Options
BR-Bright	Q2 - Square	2(1+1)	1	27-2700K	8-8°	A - Anodized Aluminum	CV - 24Vdc	XXX	XXX
			2	30-3000K	23-23°	B - Black	AC - 230Vac		
				40-4000K	43-43°	C - Cor-ten			
				50-5000K	10°x41°	X - Custom			
				RD-Red					
				GR-Green					
				BL-Blue					
				22-2200K					
				XX- Custom					

Sample: BR - Q2 - 2 - 1 - 27 - 8 - A - CV - XX - XX