

Bright R2


TECHNICAL DATA

Application	Surface mounted (wall)
Location	Outdoor
Light Source	LED
Optics	11°, 20°, 40°
LED No.	6
LED Life time (L80B10)	50000 hours
Input Voltage / Current	230Vac
Connection details	Parallel Connection
Installation	Surface mounted
Weight	0,84Kg
Supply	230Vac
Wiring	Junction in supply box
Working Temperature	-20°C - +50°C



FINISHING

Materials	Aluminium body
Finishing	Anodized Aluminum (A), Black (B), Cor-ten (C)
Diffuser	Tempered Glass Diffuser

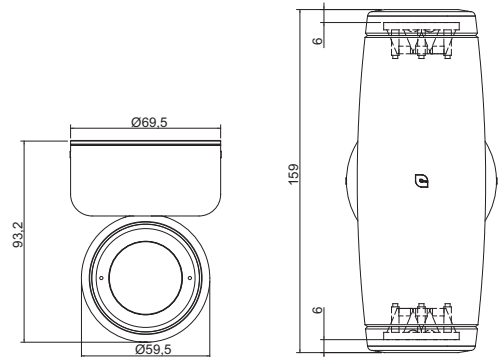

Family	Type	LED NO	WAT/LED	CCT	Optics	Finish	Power	Dimming	Options
BR-Bright	R2- Round	6(3+3)	1	27-2700K 30-3000K 40-4000K 50-5000K RD-Red GR-Green BL-Blue 22-2200K XX- Custom	11-11° 20-20° 40-40°	A - Anodized Aluminum B - Black C - Cor-ten X - Custom	AC - 230Vac	XXX	XXX

Sample: BR - R2 - 6 - 1 - 27 - 11 - A - AC - XX - XX