


Aqua R3




TECHNICAL DATA

Application	Floor / Wall / Ceiling Recessed Spot Light
Location	Indoor / Outdoor
Light Source	LED
Optics	11°, 20°, 40°
LED No.	3
LED Life time (L80B10)	50000 hours
Input Voltage / Current	350mA / 500mA
Connection details	Series
Installation	Recessed (Ceiling, Wall, Floor) Brick work installation with housing box (not included)
Weight	Kg 0,79
Installation hole	Ø48mm
Supply	350 mA / 500mA Max
Wiring	Provided with 500cm neoprene cable
Working Temperature	-40°C - +50°C

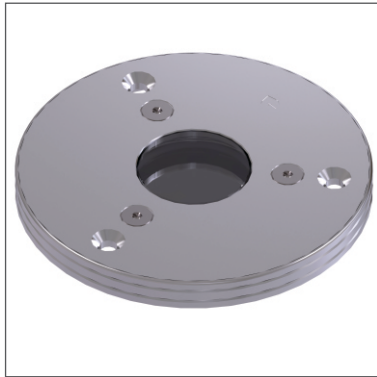

FINISHING

Materials	AISI 316L Stainless steel trim, tempered glass diffuser
Finishing	Worked Steel (I)
Color	Matte Steel
Diffuser	Tempered Glass

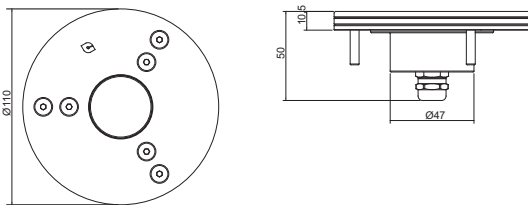

Family	Type	LED NO	WAT/LED	CCT	Optics	Finish	Power	Dimming	Options
AQ - Aqua	R3 - Round	3	1	27-2700K	11-11°	I - Worked Steel	CC-	N - None	xxx
			2	30-3000K	20-20°		(350mA/500mA)		
				40-4000K	40-40°				
				50-5000K					
				RD-Red					
				GR-Green					
				BL-Blue					
				22-2200K					
				XX- Custom					



Sample: AQ - R3 - 3 - 1 - 27 - 11 - I - CC - N - XX

ACCESSORIES

CAW68109-Acetal resin housing box

Gel Connector

Optional



5625/1121



Micro Paguro



xxx