


Aqua R4


TECHNICAL DATA

Application	Floor / Wall / Ceiling Recessed Spot Light
Location	Indoor / Outdoor
Light Source	LED
Optics	25°, 39°, 57°
LED No.	1
LED Life time (L80B10)	50000 hours
Input Voltage / Current	350mA / 500mA
Connection details	Series
Installation	Recessed (Ceiling, Wall, Floor) Brick work installation with housing box (not included)
Weight	Kg 1,26
Installation hole	Ø48mm
Supply	1050mA Max
Wiring	Provided with 500cm neoprene cable
Working Temperature	-40°C - +50°C

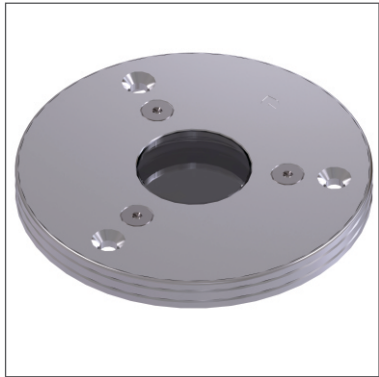

FINISHING

Materials	AISI 316L Stainless steel trim, tempered glass diffuser
Finishing	Worked Steel (I)
Color	Matte Steel
Diffuser	Tempered Glass

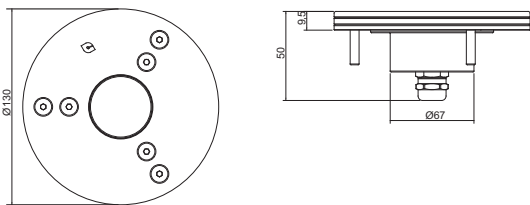



Family	Type	LED NO	WAT/LED	CCT	Optics	Finish	Power	Dimming	Options
AQ - Aqua	R4 - Round	1	12	27-2700K 30-3000K 40-4000K 50-5000K 22-2200K XX- Custom	25-25° 39-39° 57-57°	I - Worked Steel	CC-(1050mA)	N - None	xxx
Sample: AQ - R4 - 1 - 12 - 27 - 25 - I - CC - N - XX									

ACCESSORIES

CAW68109-Acetal resin housing box

Gel Connector

Optional



5625/1121



Micro Paguro



xxx