

Aqua Flood

CE IP68 ∇ F ∇ III Kg 0,200




TECHNICAL DATA

Application	Underwater Flood Light
Location	Indoor / Outdoor
Light Source	LED
Optics	12°, 24°, 45°
LED No.	1, 3, 9, 18
LED Life time (L80B10)	50000 hours
Input Voltage / Current	24VDC
Connection details	Parallel
Installation	Surface mounted
Supply	240AC
Wiring	Provided with 500cm neoprene cable
Working Temperature	-30°C - +50°C



FINISHING

Materials	AISI 316L Stainless steel trim, tempered glass diffuser
Finishing	Worked Steel (I)
Color	Matte Steel
Diffuser	Tempered Glass

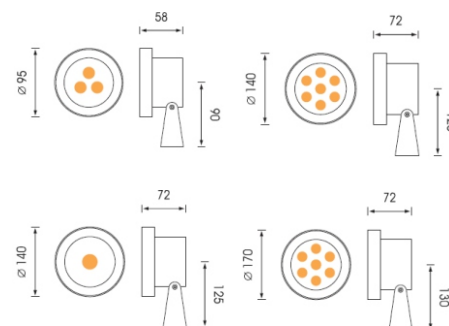

Family	Type	LED NO	WATT	CCT	Optics	Finish	Power	Dimming	Options
AF - Aqua Flood	R - Round	1(16W)	3	30 - 3000K	12 - 12°	I - Worked Steel	24 - 24V DC	N - None	xxx
		3	9	40 - 4000K	24 - 24°				
		9	16(1LED)	60 - 6000K	45 - 45°				
		18	18						

Sample: AF - R4 - 3 - 3 - 30 - 12 - I - 24 - N - XX