


Lantern R




TECHNICAL DATA

Application	Floor Mounted Bollard
Location	Outdoor
Light Source	LED
Optics	Spherical Light
LED Life time (L80B10)	50000 hours
Input Voltage / Current	100-240V AC
Connection details	Parallel (supply "P")
Installation	Floor mounted
Weight	10.500kg(A), 4.700kg(B)
Supply	100-240V AC
Wiring	Provided with 50cm neoprene cable
Control Gear	In-built
LED Module	High-power LEDs on metal-core PCB, Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electrical Protection	EMC, Inrush current
Working Temperature	-20°C - +50°C
Lumen	1060 lm



FINISHING

Materials	Heavy duty die cast aluminium
Finishing	Die cast aluminium with tempered glass diffuser
Diffuser	PMMA Diffuser
Color	Grey

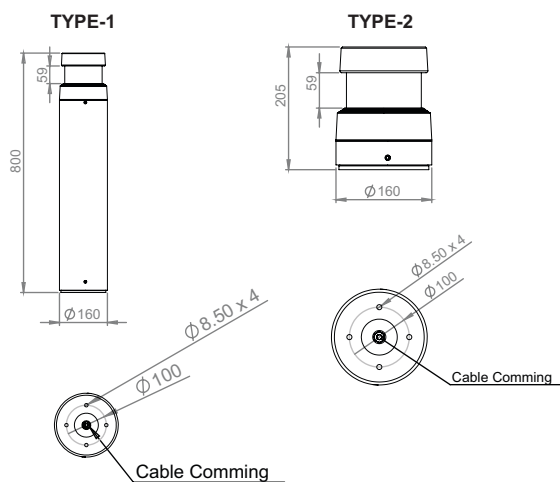

Family	Type	WATT	CCT	Optics	Finish	Power	Dimming	Options
LT-Lantern-R	1 - 800mm 2 - 205mm	20 - 20W	22-2200K	S - Spherical Light	WH - White BK - Black GR - Grey	AC - 100-240V	ND - Non Dim DA - Dali	XXX
			27-2700K					
			30-3000K					
			40-4000K					
			50-5000K					
			60-6000K					

Sample: LT-R - 1 - 20 - 22 - S - WH - AC - ND - XX