


Recessed wall / floor spotlight, ideal for the lighting of steps, sidewalks, facades, paths and gardens.



Anticorodal anodized aluminum body satinized stainless steel top and tempered glass  
 No. 1 standard finishings  
 Led no. 1 x 1 / 2 W  
 Power absorption 1 / 2 W  
 Connection Series connection respecting polarities  
 Wiring Provided with a 50 cm long cable  
 Installation On Floor / Wall with housing (not included)  
 Driver switching (not included)  
     350 mA ( 1 W )  
     500 mA ( 2 W )  
 Photometries Ref. Photometrics Page

**IP 67**

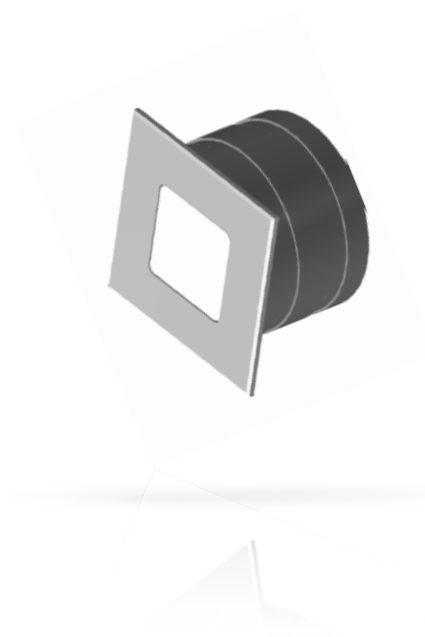

Code	Options	Supply	N° LED	LED Color	Optics	Watt	Finish
EC	0	I CC	1	0 - 2700 K 1 - 6000 K 2 - 4000 K 3 - 3000 K	4 - 120°	1 2	A - Ano Alu B - White C - Chrome

