

Bosco R




TECHNICAL DATA

Application	Surface mounted (ceiling)
Location	Indoor/Outdoor
Light Source	LED
Optics	Narrow, Medium, Wide
LED No.	1
LED Life time (L80B10)	50000 hours
Input Voltage / Current	100-277V, 100-240V
Connection details	Parallel Connection
Installation	Surface mounted ceiling
Supply	240VAC
Wiring	Provided with 30cm PVC cable
Working Temperature	-30°C - +50°C



FINISHING

Materials	Anodized aluminium body, Satinized PMMA diffuser
Finishing	Black (B), White (W), Grey (G)
Diffuser	PMMA Diffuser

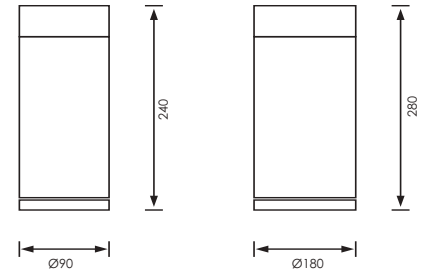

Family	Type	LED NO	WATT	CCT	Optics	Finish	Power	Dimming	Options
BO - Bosco	R - Round	1	12	27-2700K	N - Narrow	B - Black	AC - 100-240VAC	D - Dimmable	XXX
			26	30-3000K	M - Medium	W - White			
				40-4000K	W -Wide	G - Grey			
				50- 5000K					

Sample: BO - R - 1 - 12 - 27 - N - B - AC - D - XX