


CROCK BOLLARD

TECHNICAL DATA

Application	Bollard
Location	Outdoor
Light Source	LED
Optics	120°
LED Life time	50000 hours
Input Voltage / Current	AC100-240V
Connection details	Parallel Connection
Installation	Ground mounted
Supply	AC100-240V
Wiring	Provided with 150cm PVC cable
Working Temperature	-30°C - +50°C

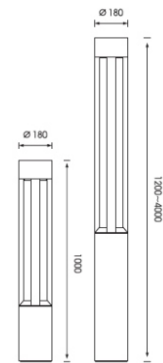

FINISHING

Materials	Heavy duty die-cast aluminium
	Lens diffuser with super white
Finishing	Black, Grey

Family	WATT	CCT	Optics	Finish	Power	Dimming	Emissions	Options
CR - Crock	20 - 20W 30 - 30W 38 - 38W 48 - 48W	30-3000K 40-4000K 60-6000K	120 - 120°	BL - Black GR - Grey	AC 100-240 V	N - None	2 - 2 Side 3 - 3 Side 4 - 4 Side	XX - Custom

Sample: CR - 20 - 30 - 120 - BL - AC - N - 2 - XX