

FLOOD DOT SPOT


TECHNICAL DATA

Application	Wall or Floor Mounted Flood light
Location	Outdoor
Light Source	LED
Optics	4°, 8°, 15°, 25°, 40°, 60°
LED Life time	50000 hours
Input Voltage / Current	AC 100-240V, DC24 V
Connection details	Parallel Connection
Installation	Ground, Wall, Pole Mounted
Supply	AC100-240V
Wiring	Provided with 30cm PVC cable
Working Temperature	-30°C - +50°C
Lumen	110-135lm/W
CRI	90



FINISHING

Materials	Heavy Duty Die Cast Aluminium body
Finishing	Black (B), White(W), Grey(G)

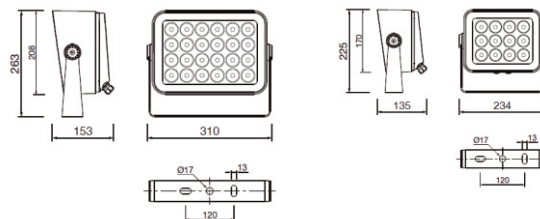

Family	WATT	CCT	Optics	Finish	Power	Dimming	Options
FDS - Flood Dot Spot	25 - 25W	27-2700K(25, 50W)	4 - 4°	B - Black	AC - AC100-240V	ND - None-Dim	XXX
	40 - 40W	30-3000K(25, 50W)	8 - 8°	W - White	DC - 24V DC	DA - Dali	
	50 - 50W	40-4000K(40, 75W)	15 - 15°	G - Grey		DM - DMX	
	75 - 75W	50-5000K(40, 75W)	25 - 25°				
	100 - 100W	RGBW-RGBW(50, 100W)	40 - 40°				
			60 - 60°				

Sample: FDS - 25 - 27 - 4 - B - AC - ND - XX


ACCESSORIES



Decorative Plate



Spill Rina



Honeycomb louvers