


MICRO CEASOR R



TECHNICAL DATA

Application	Floor / Wall Recessed Spot Light
Location	Indoor / Outdoor
Light Source	LED
Optics	30°
LED No.	1
LED Life time	50000 hours
Input Voltage / Current	350 mA / 500 mA
Connection details	Parallel Connection
Installation	Recessed (Ceiling, Wall, Floor) Brick work installation with housing box (not included) Panel installation with torsion spring (not included)
Supply	24Vdc
Wiring	Provided with 150cm neoprene cable
Working Temperature	-30°C - +50°C

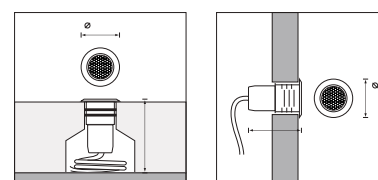


FINISHING

Materials	Anodized aluminium body, anodized aluminum or AISI 316L Stainless steel trim, tempered glass diffuser
Finishing	Anodized Aluminum (A), Worked Steel (I), Satinized Steel(S), Anodized Black (J)
Color	Matte Steel
Diffuser	Tempered Glass


Family	Type	LED NO	WATT	CCT	Optics	Finish	Power	Dimming	Options
MC-Micro Ceasor	R - Round	1	1 3	27-2700K 30-3000K 40-4000K 50-5000K	30-30°	A - Anodized Aluminum I - Worked Steel S - Satinized Steel	CC (350mA/500mA)	D - Dimmable	XXX

Sample: MC - R - 1 - 1 - 27 - 30 - A - CC - D - XX

ACCESSORIES



Recessed Box



Honeycomb



IP68 Connector