


DURANGO JR



TECHNICAL DATA

Application	Street Light
Location	Outdoor
Light Source	LED
Optics	120°
LED No.	24, 32, 48
LED Life time (L80B10)	50000 hours
Input Voltage / Current	230Vac
Connection details	Parallel Connection
Installation	Surface mounted
Weight	6,50Kg
Supply	100-277VAC 50-60Hz
Working Temperature	-30°C - +50°C

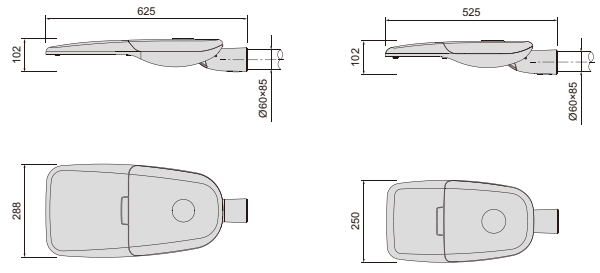

FINISHING

Materials	Heavy Duty Die-cast aluminium
Finishing	Black (B), Grey (G)
Diffuser	Tempered Glass Diffuser

Family	Type	LED NO	WATT	CCT	Optics	Finish	Power	Dimming	Options
DU - Durango JR	PT - Pole top	24	40(24Leds)	30-3000K	120 - 120°	B - Black	AC - 277Vac	ND - Non DIM	XX - XX
		32	60(24Leds)	40-4000K		G - Grey			
		48	60(32Leds)	60-6000K		X - Custom			
			80(32Leds)	XX- Custom					
			100(48Leds)						

Sample: DU - PT - 24 - 40 - 30 - 120 - B - AC - ND - XX