


# Baskin Q

## TECHNICAL DATA

Application	Recessed (wall)
Location	Outdoor / Indoor
Light Source	LED
Optics	36°/10°x80°
LED Life time	50000 hours
Input Voltage / Current	DC 24V
Connection details	Parallel Connection
Installation	Wall Recessed
Supply	DC24V
Wiring	Provided with 30cm PVC cable
Working Temperature	-30°C - +50°C

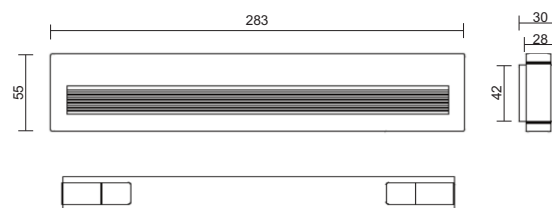

## FINISHING

Materials	Aluminium body
Finishing	Black (B), White(W), Grey(G)

Family	Type	WATT	CCT	Optics	Finish	Power	Dimming	Options
BA - Baskin	Q - Rectangle	6 - 6W(300mm)	27-2700K	36-36°	B - Black	DC - DC24V	N - None	XXX
		12 - 12W(600mm)	30-3000K	10x80 - 10°x80°	W - White			
		18 - 18W(1000mm)	40-4000K		G - Grey			
			50-5000K					

Sample: BA - Q - 6 - 27 - 36 - B - DC - N - XX