

MICRO




TECHNICAL DATA

Application	Inground Uplight
Location	Outdoor
Light Source	LED
Optics	Narrow, Medium, Wide
LED No.	1
LED Life time	50000 hours
Input Voltage / Current	24V DC
Connection details	Parallel Connection
Installation	Recessed (Wall, Floor) Brick work installation with housing box (not included)
Installation hole	Ø37/50/80
Supply	24Vdc
Wiring	Provided with 150cm neoprene cable
Working Temperature	-20°C - +50°C

FINISHING

Materials	304/316 Grade stainless steel frame, Heavy duty die-cast aluminium body, Tempered glass lens diffuser
Finishing	Anodized Aluminum (A), Worked Steel (I), Satinized Steel(S), Anodized Black (J)
Color	Matte Steel
Diffuser	Tempered Glass

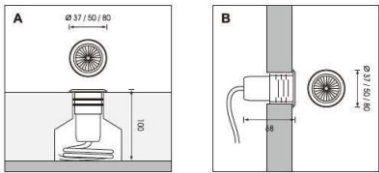

Narrow, Medium, Wide									
Family	Type	LED NO	WATT	CCT	Optics	Finish	Power	Dimming	Options
MI-Micro	R - Round	1	1	30-3000K	N - Narrow	A - Anodized Aluminium	CV	D - Dimming	37 - Ø37
			2	40-4000K	M - Medium	I - Worked Steel			50 - Ø50
			3	60-6000K	W - Wide	S - Satinized Steel			80 - Ø80
			7	XX- Custom		J - Anodized Black			


Sample: MI - R - 1 - 1 - 30 - N - A - CV - D - 37

ACCESSORIES

Optional



Recessed Box



Honey Comb



IP 68 Connector

XXX