


TECHNICAL DATA

Application	Surface mounted (Ceiling, Wall, Floor)
Location	Outdoor
Light Source	LED
Optics	Narrow, Medium, Wide
LED Life time (L80B10)	50000 hours
Input Voltage / Current	100-240VAC
Connection details	Parallel (supply "P")
Installation	Surface mounted (Ceiling, Wall, Floor)
Supply	100-240VAC-50-60Hz
Working Temperature	-30°C - +50°C

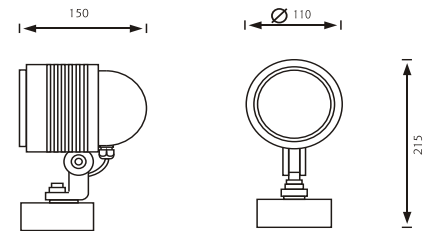


FINISHING

Materials	Die-cast aluminium tempered flat glass lens diffuser
Finishing	Anodized Aluminum (A), Black (B), Diffuser Tempered Glass


Family	Type	WATT	CCT	Optics	Finish	Power	Dimming	Options
OY - Oyester	R - Round	7 - 7W 10 - 10W 16 - 16W 20 - 20W 40 - 40W	30-3000K 40-4000K 60-6000K XX- Custom	N - Narrow M - Medium W - Wide	A - Anodized Aluminum B - Black X - Custom	AC - 100-240V	N - None	XXX

Sample: OY - R - 7 - 30 - N - A - AC - N - XX

ACCESSORIES



Spike



Honeycomb



Anchor Belt