



Neuro Acqua R



TECHNICAL DATA

Application	Floor / Wall Recessed uplight
Location	Indoor / Outdoor
Light Source	LED
Optics	Narrow, Medium, Wide
LED No.	4/6/12
LED Life time (L80B10)	50000 hours
Input Voltage / Current	DC 24V
Connection details	Series
Installation	Recessed (Wall, Floor) Brick work installation with housing box (not included)
Weight	Kg 0,20
Wiring	Provided with 150cm neoprene cable
Working Temperature	-40°C - +50°C
Lumen	80-85lm /W

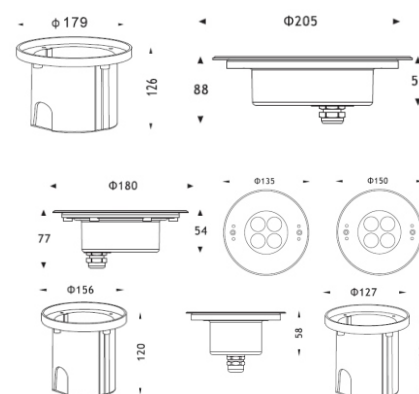

FINISHING

Materials	316 Grade Stainless steel
Finishing	Worked Steel (I)
Color	Matte Steel
Diffuser	Tempered Glass

Family	Type	LED NO	WATT	CCT	Optics	Finish	Size	Power	Dimming	Options
NA -Neuro Acqua	R - Round	4	8	27-2700K	N - Nerrow	I - Worked Steel	Ø135	DC 24V	D - Dimmable	xxx
		6	12	30-3000K	M - Medium		Ø150			
		12	16	40-4000K	W - Wide		Ø180			
			18	50-5000K	Ø205					
			24	RGB						
			36	XX- Custom						
			48							

Sample: NA - R - 4 - 8 - 27 - N - I - Ø135 - DC - D - XX

ACCESSORIES

Symmetrical Lens



Asymmetrical Lens

